



CN





SPANDICONCIME MONODISCO





• SINGLE DISC SPREADER • DISTRIBUTEUR D'ENGRAIS MONODISQUE •
• ABONADORA MONODISCO •








	MODELLO	CAPACITÀ TRAMOGGIA		CARICO UTILE MASSIMO		ALTEZZA DI CARICO		LARGHEZZA TRAMOGGIA		LARGHEZZA DI SPANDIMENTO FINO A (A SECONDA DEL CONCIME)	
	MODEL	HOPPER CAPACITY (LITRES-US GALLONS)		MAX. LOADING CAPACITY (KILOS-LBS)		LOADING HEIGHT (METRES-INCHES)		HOPPER WIDTH (METRES-INCHES)		SPREADING WIDTH UP TO (DEPENDENT ON FERTILIZER) (METRES-FEET)	
	MODÈLE	CAPACITÉ DE LA TRÉMIE		CHARGE MAXIMUM		HAUTEUR DE CHARGE		LARGEUR DE LA TRÉMIE		LARGEUR D'ÉPANDAGE JUSQU'À (SUIVANT DENSITÉ DE L'ENGRAIS)	
	MODELO	CAPACIDAD DE LA TOLVA		CAPACIDAD MÁXIMA DE CARGA		ALTURA DE CARGA		ANCHURA DE LA TOLVA		ANCHURA DE ESPARCIMIENTO HASTA (DEPENDE DEL TIPO DE ABONO)	
	C273N	200 lt	53 gal	500 kg	1100 lb	0,90 m	35 in	1,00 m	39 in	9 m	30 ft
	C503N	360 lt	95 gal	500 kg	1100 lb	1.10 m	43 in	1,20 m	47 in	9 m	30 ft
	C503N INOX	360 lt	95 gal	500 kg	1100 lb	1.10 m	43 in	1,20 m	47 in	9 m	30 ft
	C503N 2C	360 lt	95 gal	500 kg	1100 lb	1.10 m	43 in	1,20 m	47 in	2~5 m	6,5-16 ft



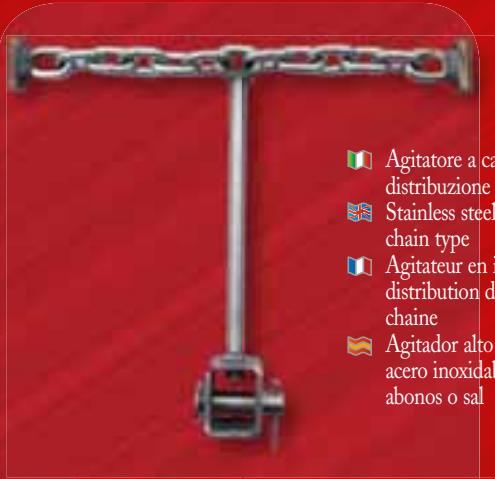



-  **Versione speciale per distribuzione sale**
-  **Special version for salt distribution**
-  **Version spéciale pour distribution sel**
-  **Version especial para distribuir sal**





-  Con gruppo di trasmissione ridotto a 260 giri, e telaio zincato a caldo con successive due applicazioni di vernice a polvere
-  With 260rpm reduced gearbox and hot galvanized chassis plus two powder coating layers
-  Avec boîtier réduit à 260 tr/min et châssis zingué à chaud suivi par deux applications de vernis en poudre
-  Con grupo de transmisión reducido de 260 giros y chasis galvanizado en caliente con dos posteriores aplicaciones de pintura en polvo



-  Agitatore a catena in inox per distribuzione sale.
-  Stainless steel agitator for sale: chain type
-  Agitateur en inox pour la distribution de sel: modèle à chaîne
-  Agitador alto de cadena de acero inoxidable adaptado para abonos o sal





-  Convogliatore laterale per la distribuzione su filari con larghezze fino a 3 mt
-  One-sided conveyor for row distribution up to 3 metres (10 ft)
-  Convoyeur latéral simple pour distribution sur rangées jusqu'à 3 metres.
-  Transportador de un solo lado para la distribución localizada hasta 3 metros



-  Deflettore per limitare la larghezza di spandimento
-  Deflector to limit spreading width
-  Déflecteur pour limiter l'épandage
-  Deflector para limitar la anchura de esparcimiento

OPTIONS



-  Agitatore alto per concimi pulverulenti
-  Tall agitator for powders
-  Agitateur long pour engrais pulvérulents
-  Agitador alto para polvos



AUTOTRASPORTI CAVALLO GIORDANO & VALLAURI s.p.a.
Divisione macchine agricole

Via Cuneo 161 - 12012 Boves (CN) ITALY
Tel. +39 0171391511 - Fax. +39 0171391507
E-mail: omb@gruppcavallo.it
Website: www.eurospand.it



AGROITA
partner

